
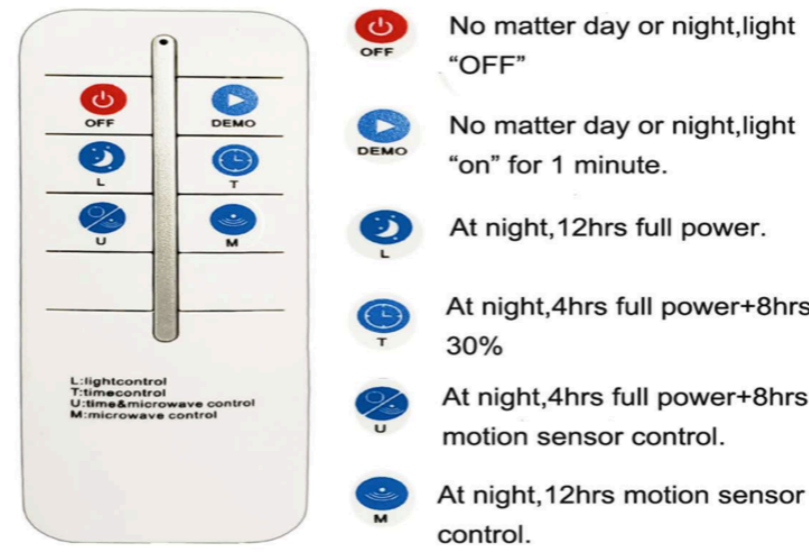
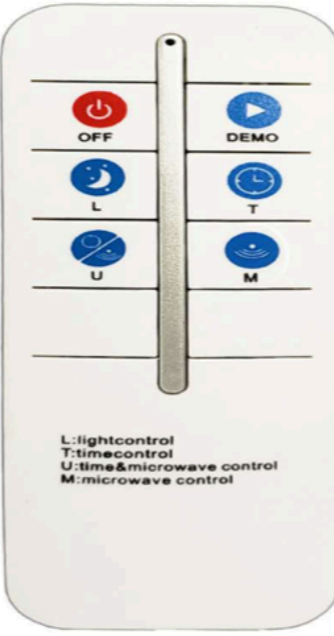







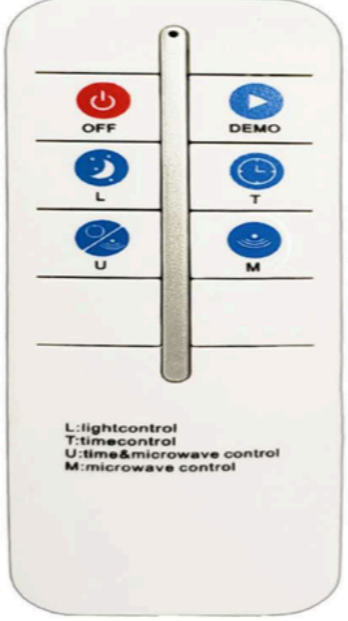








## JIANGSU SHIXIN LANDSCAPE LIGHTING CO.,LTD


Type	Pictures	Specification	EXW Unit Price (USD)				
SX-TYN-30W		<b>Features:</b> 1..High class Integrated die-casting Aluminum alloy case . 2.Lighting mode use intelligence radar sensor,sensor long distance. 3.140° view angle,lighting more area. 4..Easy to install,maintenance,Auto on/off 5.With remote control, UVA technology, bring high corrosion resistance, 30m remote control operation, 4 lighting mode.	<b>Sample</b>	<b>167</b>	<b>100+pcs</b>	<b>162</b>	
		<b>LED</b>	<b>Lighting Mode</b>				
		<b>30W Bridgelux chips 3030 (Life time 100000hours)</b>					
		<b>Lumen(LM)</b>					120LM/W
		<b>Colour Temperature</b>					3000K ~6500K (it can be customized)
		<b>LifePO4 Battery</b>					27AH 12.8V
		<b>Solar Panel</b>					18V50W Imported High Efficiency Monocrystalline Silicon
		<b>Install Pole diameter</b>					60-65mm
		<b>Mounting Height</b>					6~7m (Suggest install between space 20-25m)
		<b>Solar Charging Time</b>					6 hours by bright sunlight
		<b>Cloudy/Rainy days</b>					12 Cloudy/Rainy days
		<b>Material</b>					High Class Aluminum (anodic oxidation treatment)
		<b>Product Size</b>	820*385*180mm	<b>Packing:</b> <b>LED Lamp Packing Size:910*455*210MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:12.5KG</b> <b>Packs Containers :</b> <b>20GP:310Sets</b> <b>40GP:630Sets</b> <b>40HP:750Sets</b>			
		<b>LED Lamp</b>	80PCS				
		<b>Motion sensor</b>	Yes (Microwave Sensor)				
		<b>Remote Control</b>	Yes (1pc remote control per lot)				
		<b>Waterproof</b>	IP65				
		<b>Working Temperature</b>	-25°C to 65°C				
<b>Certificates</b>	CE、ROHS、IP65						
<b>Warranty</b>	3Years						

SX-TYN-40W	<p>Features:</p> <p>1..High class Integrated die-casting Aluminum alloy case .</p> <p>2.Lighting mode use intelligence radar sensor,sensor long distance.</p> <p>3.140° view angle,lighting more area.</p> <p>4..Easy to install,maintance,Auto on/off</p> <p>5.With remote control, UVA technology, bring high corrosion resistance, 30m remote control operation, 4 lighting mode.</p>		Sample	197	100+pcs	193
	<b>LED</b>	<b>40W Bridgelux chips 3030 (Life time 100000hours)</b>	<b>Lighting Mode</b>			
	Lumen(LM)	120LM/W	 <ul style="list-style-type: none"> <li> No matter day or night,light "OFF"</li> <li> No matter day or night,light "on" for 1 minute.</li> <li> At night,12hrs full power.</li> <li> At night,4hrs full power+8hrs 30%</li> <li> At night,4hrs full power+8hrs motion sensor control.</li> <li> At night,12hrs motion sensor control.</li> </ul>			
	Colour Temperature	3000K ~6500K (it can be customized)				
	LifePO4 Battery	28AH 12.8V				
	Solar Panel	18V65W Imported High Efficiency Monocrystalline Silicon				
	Install Pole diameter	60-65mm				
	Mounting Height	7~8m (Suggest install between space 25-30m)				
	Solar Charging Time	6 hours by bright sunlight				
	<b>Cloudy/Rainy days</b>	<b>12 Cloudy/Rainy days</b>				
	Material	High Class Aluminum (anodic oxidation treatment)				
	Product Size	960*385*180mm				
	LED Lamp	80PCS				
	Motion sensor	Yes (Microwave Sensor)				
	Remote Control	Yes (1pc remote control per lot)				
	Waterproof	IP65				
	Working Temperature	-25°C to 65°C				
	Certificates	CE, ROHS, IP65				
	Warranty	3Years				


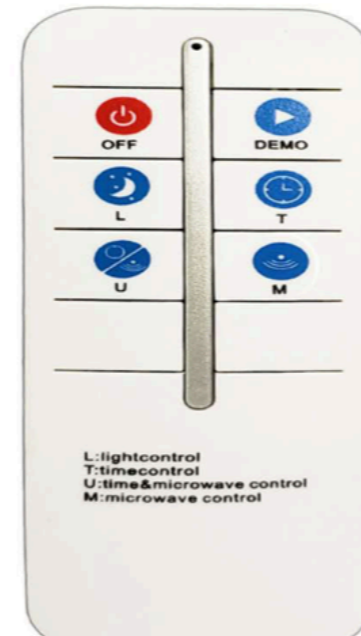






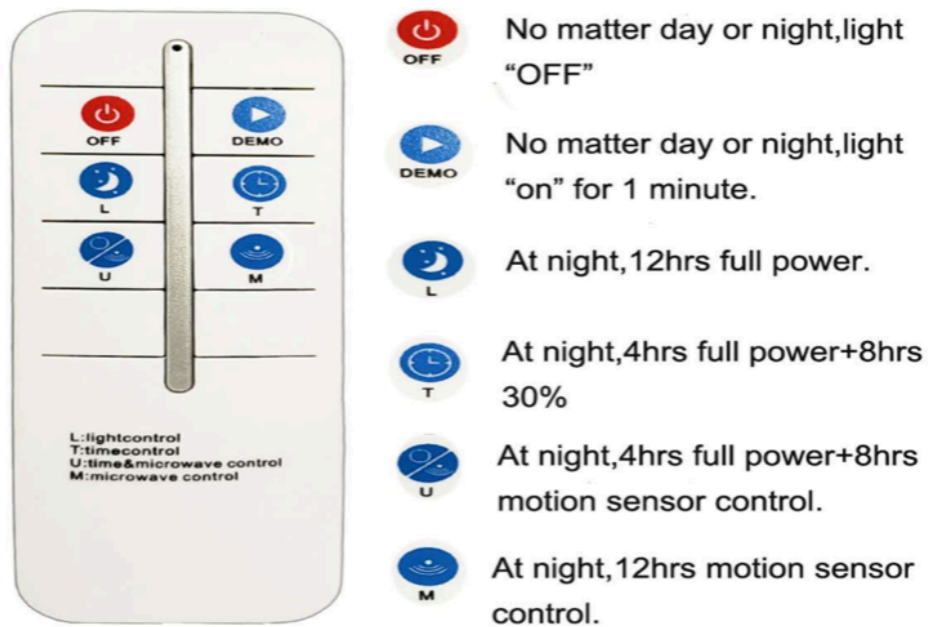


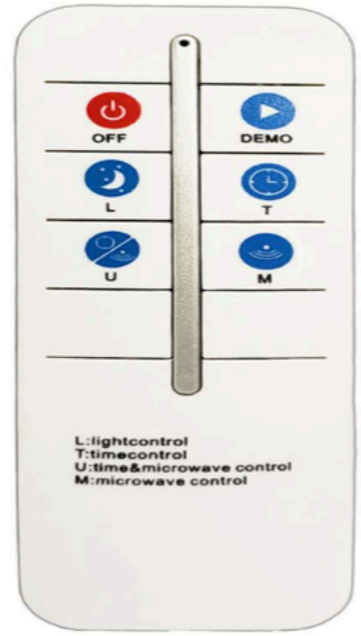






SX-TYN-50W	 <p>SHIXIN LIGHTING 15<sup>th</sup> years Gold Supplier</p> <p>Jiangsu Shixin Landscape Lighting Co., Ltd.</p>	<b>Features:</b> 1..High class Integrated die-casting Aluminum alloy case . 2.Lighting mode use intelligence radar sensor,sensor long distance. 3.140° view angle,lighting more area. 4..Easy to install,maintance,Auto on/off 5.With remote control, UVA technology, bring high corrosion resistance, 30m remote control operation, 4 lighting mode.	<b>Sample</b>	<b>247</b>	<b>100+pcs</b>	<b>243</b>	
		<b>LED</b> <b>50W Bridgelux chips 3030 (Life time 100000hours)</b>	<b>Lighting Mode</b>				
		Lumen(LM)	120LM/W	 <ul style="list-style-type: none"> <li> <b>OFF</b> No matter day or night,light "OFF"</li> <li> <b>DEMO</b> No matter day or night,light "on" for 1 minute.</li> <li> <b>L</b> At night,12hrs full power.</li> <li> <b>T</b> At night,4hrs full power+8hrs 30%</li> <li> <b>U</b> At night,4hrs full power+8hrs motion sensor control.</li> <li> <b>M</b> At night,12hrs motion sensor control.</li> </ul>			
		Colour Temperture	3000K ~6500K (it can be customized)				
		LifePO4 Battery	36AH 12.8V				
		Solar Panel	18V70W Imported High Efficiency Monocrystalline Silicon				
		Install Pole diameter	60-65mm				
		Mounting Height	7~9m (Suggest install between space 20-30m)				
		Solar Charging Time	6 hours by bright sunlight				
		<b>Cloudy/Rainy days</b>	<b>12 Cloudy/Rainy days</b>				
		Material	High Class Aluminum (anodic oxidation treatment)				
		Product Size	1190*385*180mm				
		LED Lamp	160PCS				
		Motion sensor	Yes (Macrowave Sensor)				
		Remote Control	Yes (1pc remote control per lot)				
Waterproof	IP65						
Working Temperture	-25°C to 65°C						
Certificates	CE、ROHS、IP65						
Warranty	3Years						
		<b>Packing:</b> <b>LED Lamp Packing Size:1270*455*210MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:16.7KG</b> <b>Packs Containers :</b> <b>20GP:230Sets</b> <b>40GP:470Sets</b> <b>40HP:560Sets</b>					




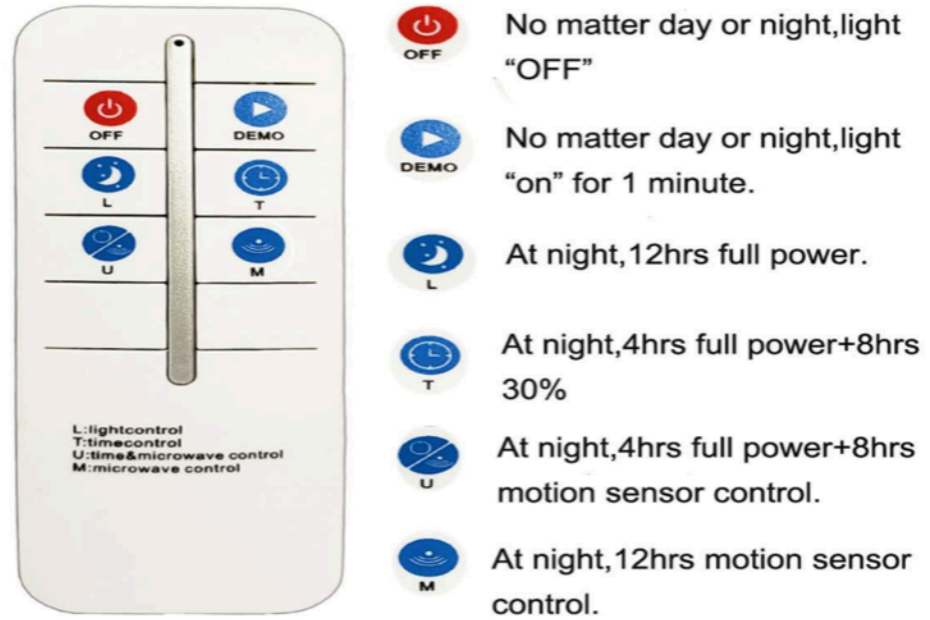
SX-TYN-60W	Features: 1..High class Integrated die-casting Aluminum alloy case . 2.Lighting mode use intelligence radar sensor,sensor long distance. 3.140° view angle,lighting more area. 4..Easy to install,maintance,Auto on/off 5.With remote control, UVA technology, bring high corrosion resistance, 30m remote control operation, 4 lighting mode.		Sample	256	100+pcs	252
	<b>LED</b>	<b>60W Bridgelux chips3030 (Life time 100000hours)</b>	<b>Lighting Mode</b>			
	Lumen(LM)	120LM/W				
	Colour Temperature	3000K ~6500K (it can be customized)				
	LifePO4 Battery	42AH 12.8V				
	Solar Panel	18V80W/Imported High Efficiency Monocrystalline Silicon				
	Install Pole diameter	60-65mm				
	Mounting Height	7~9m (Suggest install between space20-30m)				
	Solar Charging Time	6 hours by bright sunlight				
	<b>Cloudy/Rainy days</b>	<b>12 Cloudy/Rainy days</b>				
	Material	High Class Aluminum (anodic oxidation treatment)				
	Product Size	1190*385*180mm				
	LED Lamp	160PCS	<b>Packing:</b> <b>LED Lamp Packing Size:1270*455*210MM</b> <b>Q'ty/ctn:1Set</b> <b>G.W:17KG</b> <b>Packs Containers :</b> <b>20GP:230Sets</b> <b>40GP:470Sets</b> <b>40HP:560Sets</b>			
	Motion sensor	Yes (Microwave Sensor)				
	Remote Control	Yes (1pc remote control per lot)				
	Waterproof	IP65				
	Working Temperature	-25°C to 65°C				
	Certificates	CE、ROHS、IP65				
	Warranty	3Years				



SX-TYN-80W	 <p>SHIRIN LIGHTING 15<sup>th</sup> years Gold Supplier</p> <p>Jiangsu Shirin Landscape Lighting Co., Ltd.</p>	<b>Features:</b> 1..High class Integrated die-casting Aluminum alloy case . 2.Lighting mode use intelligence radar sensor,sensor long distance. 3.140° view angle,lighting more area. 4..Easy to install,maintenance,Auto on/off 5.With remote control, UVA technology, bring high corrosion resistance, 30m remote control operation, 4 lighting mode.	<b>Sample</b>	<b>333</b>	<b>100+pcs</b>	<b>327</b>	
		<b>LED</b>	<b>80W Bridgelux chips 3030 (Life time 100000hours)</b>	<b>Lighting Mode</b>			
		Lumen(LM)	120LM/W	 <ul style="list-style-type: none"> <li> <b>OFF</b> No matter day or night,light "OFF"</li> <li> <b>DEMO</b> No matter day or night,light "on" for 1 minute.</li> <li> <b>L</b> At night,12hrs full power.</li> <li> <b>T</b> At night,4hrs full power+8hrs 30%</li> <li> <b>U</b> At night,4hrs full power+8hrs motion sensor control.</li> <li> <b>M</b> At night,12hrs motion sensor control.</li> </ul>			
		Colour Temperature	3000K ~6500K (it can be customized)				
		LifePO4 Battery	57AH 12.8V				
		Solar Panel	18V100W Imported High Efficiency Monocrystalline Silicon				
		Install Pole diameter	60-65mm				
		Mounting Height	8~10m (Suggest install between space 25-35m)				
		Solar Charging Time	6 hours by bright sunlight				
		<b>Cloudy/Rainy days</b>	<b>12 Cloudy/Rainy days</b>				
		Material	High Class Aluminum (anodic oxidation treatment)				
		Product Size	1630*385*55mm (LED lamp) 585*125*320mm (Brackets)				
		LED Lamp	160PCS				
		Motion sensor	Yes (Microwave Sensor)				
		Remote Control	Yes (1pc remote control per lot)				
Waterproof	IP65						
Working Temperature	-25°C to 65°C						
Certificates	CE, ROHS, IP65						
Warranty	3Years						

SX-TYN-100W		<b>Features:</b> 1..High class Integrated die-casting Aluminum alloy case . 2.Lighting mode use intelligence radar sensor,sensor long distance. 3.140° view angle,lighting more area. 4..Easy to install,maintance,Auto on/off 5.With remote control, UVA technology, bring high corrosion resistance, 30m remote control operation, 4 lighting mode.	<b>Sample</b>	<b>402</b>	<b>100+pcs</b>	<b>396</b>	
		<b>LED</b>	<b>100W Bridgelux chips3030 (Life time 100000hours)</b>	<b>Lighting Mode</b>			
		Lumen(LM)	120LM/W	 <ul style="list-style-type: none"> <li> <b>OFF</b> No matter day or night,light "OFF"</li> <li> <b>DEMO</b> No matter day or night,light "on" for 1 minute.</li> <li> <b>L</b> At night,12hrs full power.</li> <li> <b>T</b> At night,4hrs full power+8hrs 30%</li> <li> <b>U</b> At night,4hrs full power+8hrs motion sensor control.</li> <li> <b>M</b> At night,12hrs motion sensor control.</li> </ul>			
		Colour Temperture	3000K ~6500K (it can be customized)				
		LifePO4 Battery	63AH 12.8V				
		Solar Panel	18V130W Imported High Efficiency Monocrystalline Silicon				
		Install Pole diameter	60-65mm				
		Mounting Height	9~12m (Suggest install between space30-40m)				
		Solar Charging Time	6 hours by bright sunlight				
		<b>Cloudy/Rainy days</b>	<b>12 Cloudy/Rainy days</b>				
		Material	High Class Aluminum (anodic oxidation treatment)				
		Product Size	1950*385*55mm (LED lamp) 585*125*320m (Brackets)				
		LED Lamp	240PCS				
		Motion sensor	Yes (Microwave Sensor)				
		Remote Control	Yes (1pc remote control per lot)				
		Waterproof	IP65				
		Working Temperture	-25°C to 65°C				
		Certificates	CE、ROHS、IP65				
Warranty	3Years						



SX-TYN-120W		<b>Features:</b> 1..High class Integrated die-casting Aluminum alloy case . 2.Lighting mode use intelligence radar sensor,sensor long distance. 3.140° view angle,lighting more area. 4..Easy to install,maintenance,Auto on/off 5.With remote control, UVA technology, bring high corrosion resistance, 30m remote control operation, 4 lighting mode.	<b>Sample</b>	<b>434</b>	<b>100+pcs</b>	<b>427</b>	
		<b>LED</b>	<b>120W Bridgelux chips3030 (Life time 100000hours)</b>	<b>Lighting Mode</b>			
		Lumen(LM)	120LM/W				
		Colour Temperature	3000K ~6500K (it can be customized)				
		LifePO4 Battery	72AH 12.8V				
		Solar Panel	18V140W Imported High Efficiency Monocrystalline Silicon				
		Install Pole diameter	60-65mm				
		Mounting Height	9~12m (Suggest install between space30-40m)				
		Solar Charging Time	6 hours by bright sunlight				
		<b>Cloudy/Rainy days</b>	<b>12 Cloudy/Rainy days</b>				
		Material	High Class Aluminum (anodic oxidation treatment)				
		Product Size	1950*385*55mm (LED lamp) 585*125*320m (Brackets)				
		LED Lamp	240PCS				
		Motion sensor	Yes (Microwave Sensor)				
		Remote Control	Yes (1pc remote control per lot)				
		Waterproof	IP65				
		Working Temperature	-25°C to 65°C				
		Certificates	CE、ROHS、IP65				
Warranty	3Years						

Remarks:

1. Price in this offer are based on EXW price,not including Light pole,Shipping cost,tax and duties;
2. Payment Terms: 30% deposit ,balance before shipment .
3. Warranty: 5 years, we will be free maintenance or replacement damage parts during warranty period.
4. Quotation validity:20 days;Products specification and Price is depend on the confirm contract.

